


ALGAE

696-001010323660


ALGAE L PD SUSPENSION made of aluminium, black, similar to RAL 9005, anti-glare LF0 lens due to microfaceted structure beam 55°, light output direct, with converter, max. 350mA, dimmable not dimmable, cable black, soft-touch, adapter/ceiling base black, pendant length 1500mm, IP20



DRAWING

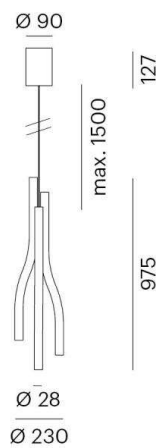

LIGHT DISTRIBUTION CURVE

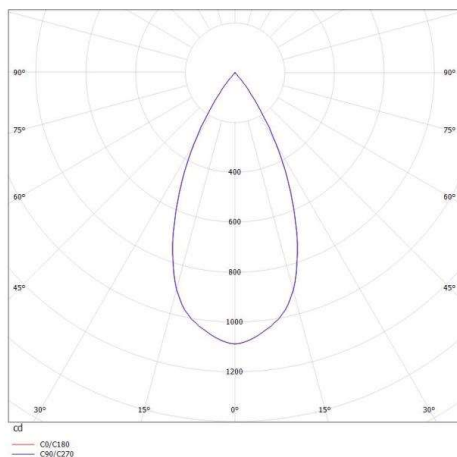

TECHNICAL DETAILS

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	710
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Optics	LF0 lens
Designer	Rainer Mutsch
Dimming	nicht dimmbar
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	140
Height [mm]	975
Pendant length [mm]	1500
Diameter [mm]	230
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,46
Color lamp	black
RAL	9005
Color adapter/ceiling base	black
Electric wire	black, soft-touch
EAN-Number	9010506000405
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	50



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.