



ALGAE

696-00101032955d


ALGAE L PD SUSPENSION made of aluminium, white, similar to RAL 9016, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, with converter, max. 350mA, dimmable DALI, cable white, soft-touch, adapter/ceiling base white, pendant length 1500mm, IP20

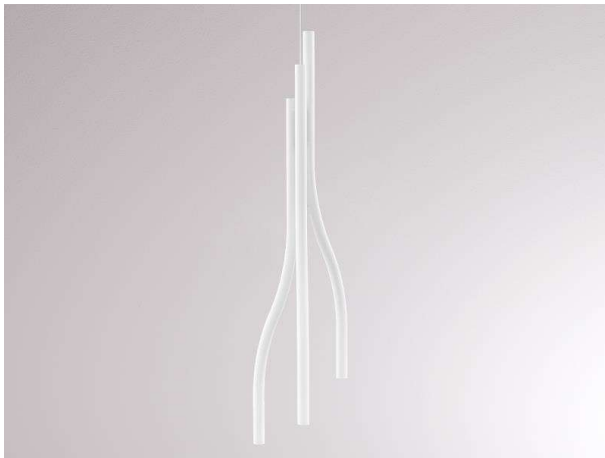

DRAWING

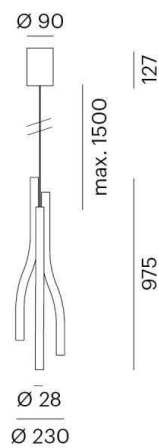

LIGHT DISTRIBUTION CURVE

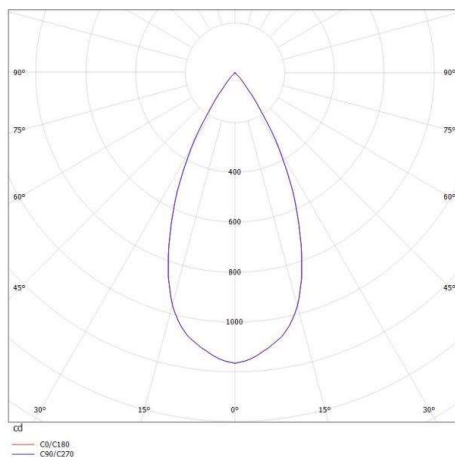

TECHNICAL DETAILS

| | |
|---------------------|------------------|
| System perform. [W] | 15 |
| Bulb type | LED |
| Luminous flux [lm] | 760 |
| Current sec. [mA] | 350 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | LFO lens |
| Designer | Rainer Mutsch |
| Dimming | DALI |
| Light output | direct |
| Beam angle [°] | 55° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |

| | |
|---------------------|------------------|
| Length [mm] | 140 |
| Height [mm] | 975 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 230 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 2,19 |

| | |
|----------------------------|-------------------|
| Color lamp | white |
| RAL | 9016 |
| Color adapter/ceiling base | white |
| Electric wire | white, soft-touch |
| EAN-Number | 9010506000467 |
| Lifetime [h] | L80 B10 50 000 |
| No. of luminaires B16A | 30 |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.