


## ALGAE

696-00101032973d


ALGAE L PD SUSPENSION made of aluminium, chalk, similar to RAL 7030, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, with converter, max. 350mA, dimmable DALI, cable black, soft-touch, adapter/ceiling base chalk, pendant length 1500mm, IP20



## DRAWING

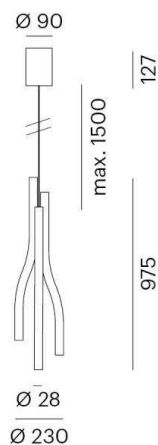

## LIGHT DISTRIBUTION CURVE

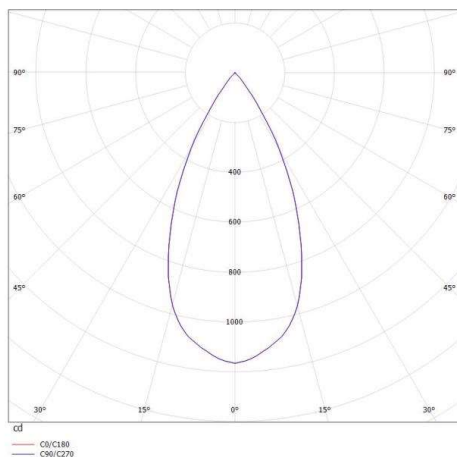

## TECHNICAL DETAILS

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	760
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
Optics	LFO lens
Designer	Rainer Mutsch
Dimming	DALI
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	140
Height [mm]	975
Pendant length [mm]	1500
Diameter [mm]	230
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,19

Color lamp	chalk
RAL	7030
Color adapter/ceiling base	chalk
Electric wire	black, soft-touch
EAN-Number	9010506000535
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	30



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.